

V18 Extend Woofer Product Information



Product Information Version-1.0



V18 Extend Woofer Product Information

SAFETY INSTRUCTIONS



1. Read this document

2. Pay attention to all safety instructions and hazards and obligatory warnings

3. Do not use equipment or accessories that are not approved by QANON AUDIO.

4. Attention to Sound Level

Do not approach the speaker when operating, and consider wearing earplugs.

Speaker system can produce very high sound pressure level (SPL), which can be instantaneous.

It results in permanent hearing impairment to performers, producers and audiences.

Listening can take place for a long time:

8 hours 90 decibels (A-weighted), 30 minutes 110 decibels (A-weighted), less than 4 minutes 130 decibels (A-weighted).

5. Read the manual before operating the product.

Use speaker system components described in user manual and follow instructions

6. Read the rigging manual before installing the product.

Use the hanging accessories described in the installation manual and follow the relevant procedures.

7. Before repairing the product, please read the "Maintenance" section of this document.

8. Do not expose products to extreme conditions

Do not expose the product to rain or waves.

Do not expose the product to humidity (fog, steam, humidity, cooling, etc.) or overheating (direct sunlight, radiator...) For a long time

9. Do not store products on unstable carts, brackets, tripods, brackets or tables.

10. Maintain this document as an integral part of the product

Put this document in a safe place.

Record any services of the product in the maintenance section of this document

Do not resell products without this update document

Thank you for purchasing QANON AUDIO #V18. The container shall contain - 1 #V18 enclosure. Each QANON AUDIO #product has been tested and inspected before it leaves the factory and should arrive intact. Carefully open the container and check for any apparent damage. If so, inform the transport company or distributor immediately. Only the consignee can claim against the carrier for damage in transit. Cartons and packing materials must be kept for inspection by carriers. Read this document carefully to familiarize yourself with the product and identify external documents that contain basic information on correct and safe installation and operation of the product. All the documents described below can be accessed free of charge on the QANON AUDIO < website (www.qanon-audio.com).

As part of the continuous development of technology and standards, QANON AUDIO reserves the following rights:

Change product specifications and document contents without prior notice. Please visit the QANON AUDIO website regularly to download the latest updates of documents and software.

www.qanon-audio.com

V18 Extend Woofer Product Information



Product Information Version-1.0

Features

- Maximum SPL 137dB
- 1 x 18"neodymium low frequency drive unit
- 0° horizontal
- Adjust angle +6°, +5°, +4°, +3°, +2°, +1°, 0°, -1°, -2°, -3°
- Rigging or ground stacking integrated assembly system
- Lifting V10 speaker system integration
- Lifting V8 speaker system integration
- Low frequency limit extends to 30Hz (-10dB)
- VS28 Subwoofer

V18 High Power Extended Low Frequency Loudspeaker

V18 is a recommended subwoofer for V10 and V8 line arrays and other QANON AUDIO < products. It adds to the sub-low frequency of the system by enhancing the throwing ability of the low frequency. It allows the operating frequency range of the system to be extended to 30Hz.

The V18 Extended Low Frequency Loudspeaker contains an 18-inch speaker. It has strong impact force, sensitivity and low frequency efficiency. Its internal sides have H-shaped vent progressive shape, allowing laminar flow and reducing turbulent noise. These comprehensive characteristics help to improve the working level.

The V18 enclosure is made of Baltic birch plywood to ensure maximum acoustic and mechanical integrity.

The V18 subwoofer can be used as an independent array or fly at the top of a vertical array composed of V10 or V8 line arrays. V18 is driven and amplified by C15 or VDA18/VDA12 power controller. Protect and optimize different configurations of loudspeaker systems, including cardioid

Dimensions: 700 mm (27.5 inches), height: 500 mm (19.7 inches), depth: 700 mm (27.5 inches), weight:61kg (132.5lbs)
The cabinet shall be fitted with internal hardware and connected via two parallel NL-4 SpeakOn

V18 Extend Woofer Product Information



Product Information Version-1.0

V18 Technical Specification

Type	Subwoofer
Frequency Response(Preset)	30Hz-300Hz(-6dB)
Horizontal	0°
Angle Increments(V10 / V8)	-1°- 2°- 3°
Angle Increments(V10 / V8)	0° +1° +2° +3° +4° +5° +6°
Drivers	LF:1×18" Neodymium
Handling Power (AES)	LF:1200W
Maximum Peak SPL	137dB/1m
Nominal Impedance	LF:8Ω
Connections	2 x NL4 SpeakOn
Pin Connections	NL4=LF: +1-1
Heigh Front	500mm
Heigh Back	500mm
Width	700mm
Depth	700mm
Weight	61kg/132.5lb

Rigging and Handling

Handle	4 ergonomic handles
Pole socket	1x35mm Pole socket
Fastener	6 side fastener

Physical Data


Material	Baltic Birch Plywood
Finish	Dark grey
Front	Polyester powder-coated steel grill
Rigging	Steel
Protection rating	IP45

V18 Extend Woofer Product Information



Product Information Version-1.0

Dimensions

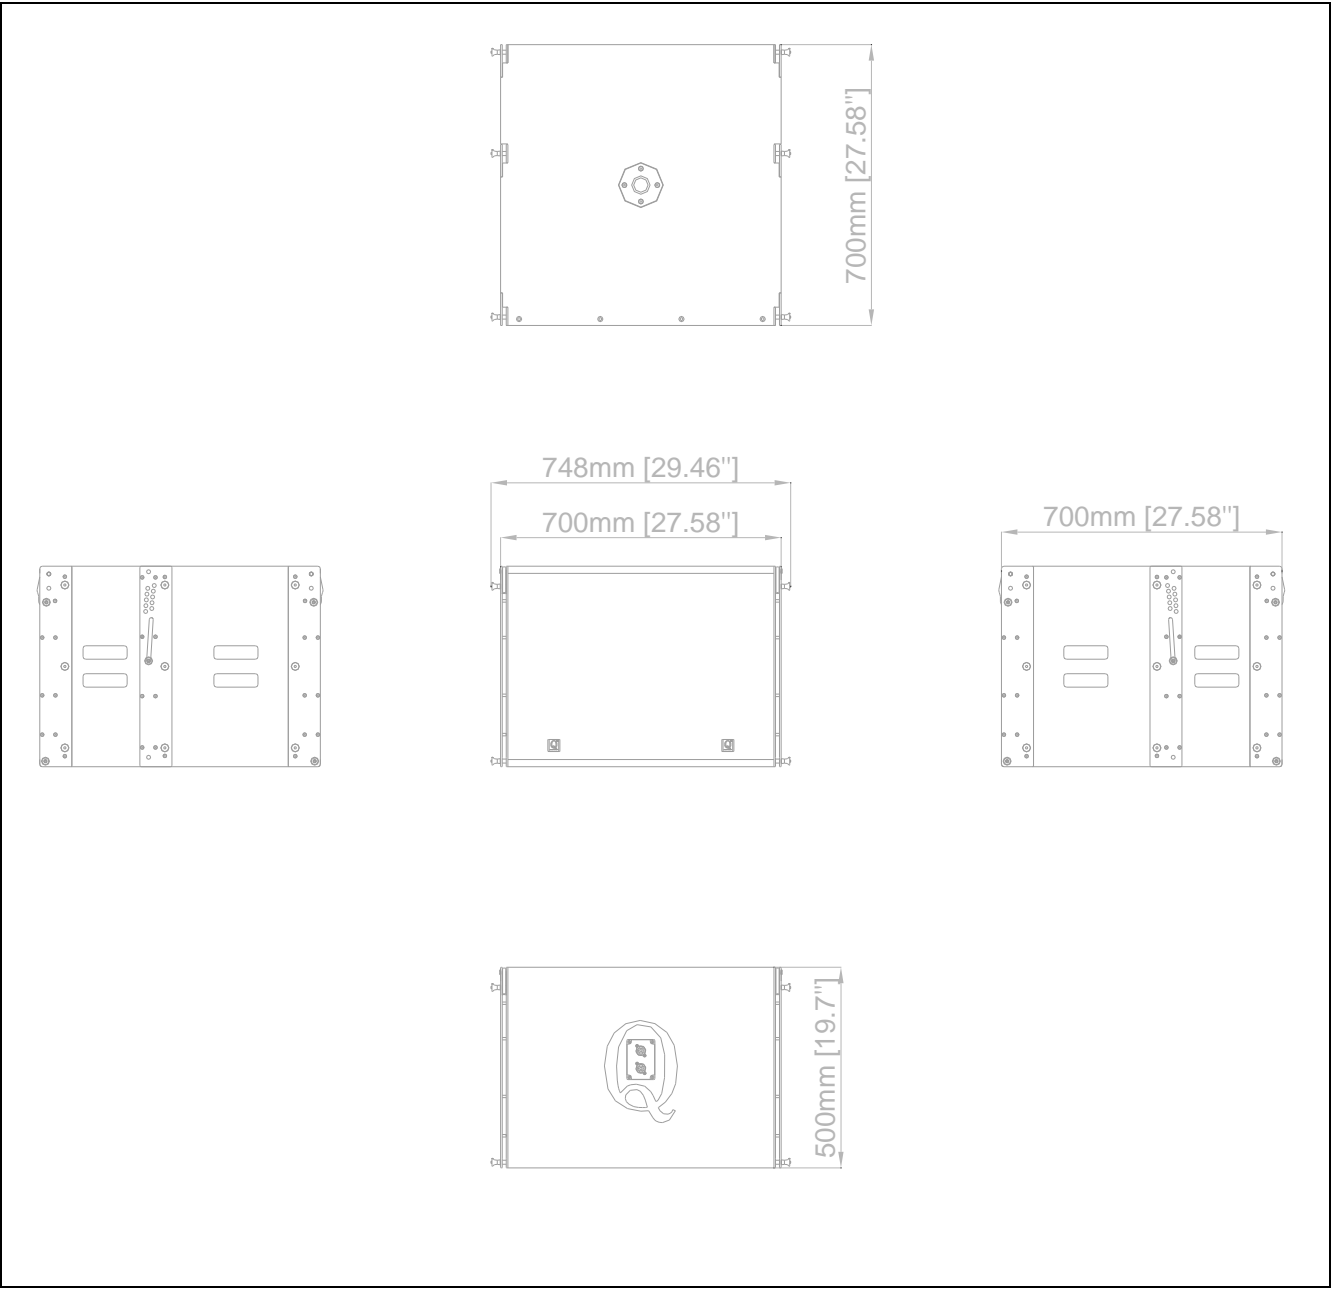

V18 Extend Woofer Product Information



www.qanon-audio.com

Product Information Version-1.0


Application

V18 low-frequency system design uses at least 1/group, suspension up to 12/group box multi-configuration, suspension also uses 6 points of lifting mode, using 4mm steel (synthetic width is 18mm), 8mm steel connecting rod, suspension has 10:1 safety factor when suspending 12 speakers. V18 can be integrated with V10/V8 speaker suspension system. V18 ultra-low frequency speaker can be integrated with suspension or ground stacking. It can be used with V10/V8 speaker without adding a converter rack. It provides a fast and simple ground stacking application. The V18 low-frequency loudspeaker system can be installed in straight line, curve or Front Back Front to meet the needs of hanging purposes. V18 low-frequency loudspeaker and V10/V8 full-frequency loudspeaker are designed to enhance the low-frequency response of the system, and have ultra-high efficiency dynamic response information.


The V10/V8 line array is connected to the V18 ultra low frequency speaker

Adjust angle: +6°, +5°, +4°, +3°, +2°, +1°, 0°, -1°, -2°, -3°



V10+V18

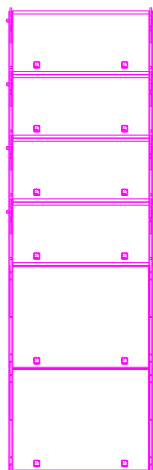

V10 + Sub

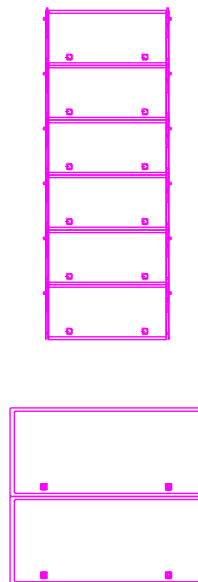

V10+V18+Sub

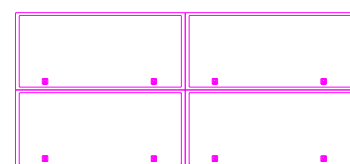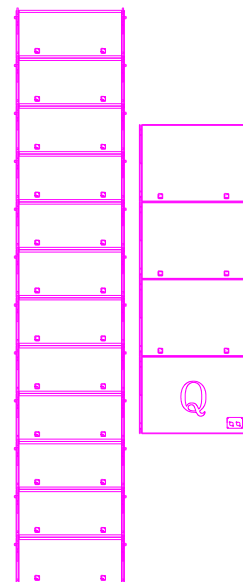

www.qanon-audio.com

V18 Extend Woofer Product Information



TRANSPORTATION ACCESSORIES

V18-Touring case: removable front case on wheels (one V18)



V18-Chariot: chariot for up to two V18

V18-Chariot Cover: Protective cover for two V18 on V18-Chariot



Rigging Frame Accessories

V10 / V8-Hoist connector chain 2t

V10 / V8-U Shackle 2t



Rigging Frame with Extender Beam for V15 and V12 enclosures

V10 / V8-Bump

V10 / V8-Bar with Extender Beam



Rigging Frame with Down Fill for V15 and V12 enclosures


V10 / V8-DownFill V15

V10 / V8-DownFill V12



Rigging Frame Touring Case with

V10 / V8 Bump x2



V10 / V8 4Pin NL4 4 x 4 mm² Speaker Cable (50cm)


V10 / V8 4Pin NL4 4 x 4 mm² Speaker Cable (20m)



V18 Extend Woofer Product Information


VDA DSP AMPLIFIED CONTROLLER

VDA Rack

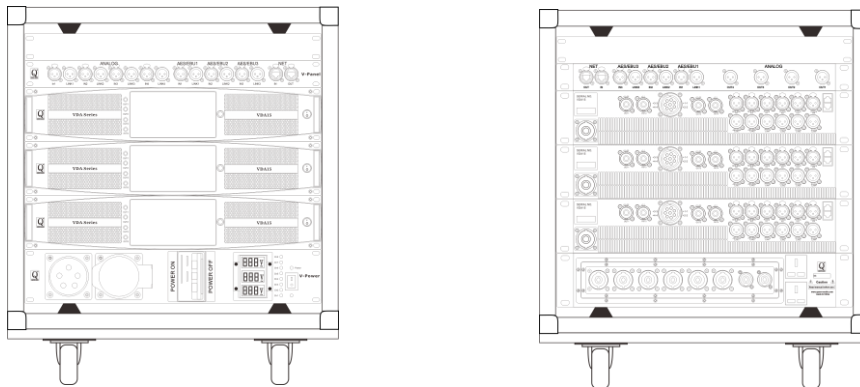

C15 AMPLIFIED CONTROLLER with Processor

C15 Rack

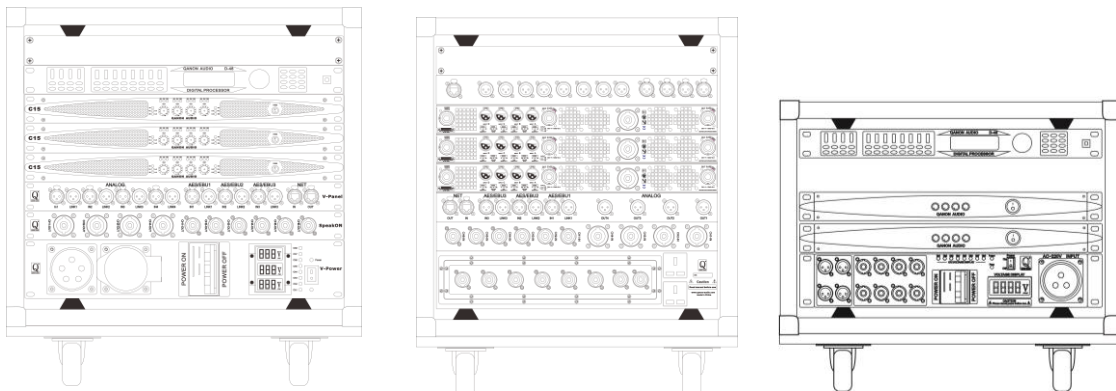

ASSOCIATED ENCLOSURES

V15/V12



V10/V8



VS221/VS28/V25



www.qanon-audio.com